

# AQUABION®

## Galvanic Water Treatment

### Without chemicals or external power supply




## Technical sheet

# AQUABION® AB-H50



Pressure drop at type AB-H50

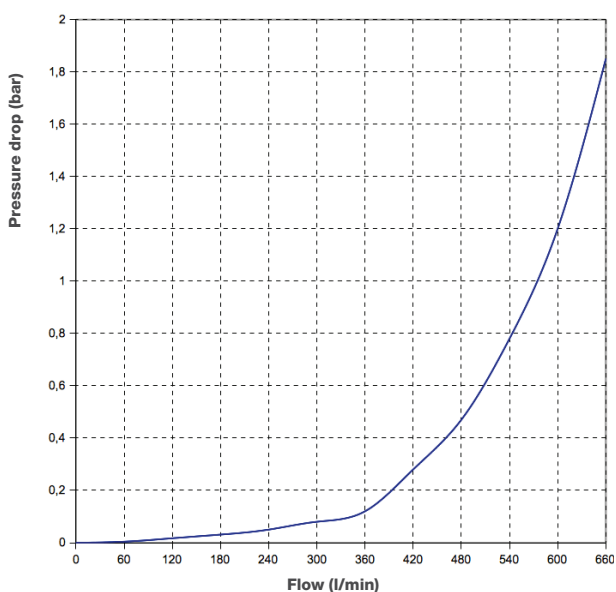

**Internal diameter** 2" DN50

Connection female

Length 390 mm

Body diameter 80 mm

Weight 7,85 kg

Maximum pressure 16 bar

Nominal flow at 2m/s 20,0 m<sup>3</sup>/h

Pressure drop at nominal flow 0,16 bar

**Material** **Body** **CuZn39Pb3 (2.0401)**

Internal parts Zinc anode Zn2 DIN EN 1179

Swirling body 1.4301

Sealing ring PTFE

Construction The body of the device consists of a single sleeve with two threaded nipples

Temperatures of use Warm water:  
- stored 60°C  
- circulating 60°C

**IMPORTANT:** AQUABION® must be installed in metal or plastic piping with metal piping before and after AQUABION® and with equipotential bonding.

